

# **Best Trace Format (BTF)**

**Technical Specification** 

Version 2.2.0

## **Version History**

Version	Date	Author	Description
2.2.0	2020-03-01	Vector Informatik GmbH	<ul> <li>&gt; Updated structure of specification</li> <li>&gt; Updated introduction</li> <li>&gt; Update descriptions for comment, parameter and event sections</li> <li>&gt; Outline constraints for comment, parameter and event sections</li> <li>&gt; Improved and added examples</li> <li>&gt; Change instance number of scheduler from -1 to 0</li> <li>&gt; Changed source entity type of mtalimitexceeded to stimulus</li> <li>&gt; Add new source entity type for OS-Events</li> <li>&gt; Add process interrupt_suspended event</li> <li>&gt; Removed timing tool specific simulation and system events</li> <li>&gt; Removed timing tool specific process events boundedmigration, phasemigration, fullmigra- tion and enforcedmigration</li> <li>&gt; Removed timing tool specific scheduler events processactivate, processpolling and processter- minate</li> <li>&gt; Removed timing tool specific semaphore event ready and exclusivesemaphore</li> </ul>
2.1.5	2016-01-29	Timing-Architects Embedded Systems GmbH	<ul> <li>Semaphore state chart: added missing state transition.</li> <li>Updated description of Interrupt Service Routine: short version is changed from ISR to I.</li> <li>Added System-Events.</li> <li>Updated description of OS-Events.</li> <li>Improved description of SourceInstance in 2.3.</li> <li>Corrected description of #typeTable.</li> <li>Improved description of Source and Target in 2.3.</li> </ul>
2.1.4	2015-03-24	Timing-Architects Embedded Systems GmbH	<ul> <li>&gt; Added Scheduler, OS-Events, Semaphore- Events and Simulation-Events.</li> <li>&gt; Updated examples.</li> <li>&gt; Corrected diction of mtalimitexceeded.</li> <li>&gt; Changed allowed source type for activating a process.</li> </ul>
2.1.3	2014-04-10	Timing-Architects Embedded Systems GmbH	Process state chart: changed layout according to OSEK state order.



Version	Date	Author	Description
2.1.1	2013-10-30	Timing-Architects Embedded Systems GmbH	Clarified description and examples regard- ing difference preempt/suspend for process- es/runnables.
2.1	2013-06-18	Timing-Architects Embedded Sys- tems GmbH, Robert Bosch GmbH	<ul> <li>Changed Process State Chart for compliance to OSEK 2.2.3 Extended Task Model.</li> <li>Improved some descriptions.</li> </ul>
2.0.2	2013-04-22	Timing-Architects Embedded Systems GmbH	First public release.
2.0.1	2013-03-29	Timing-Architects Embedded Systems GmbH	Added state charts and description of all entities.
2.0	2012-04-17	Timing-Architects Embedded Systems GmbH	Added new data types.
1.0	2011-07-18	Timing-Architects Embedded Systems GmbH, INCHRON GmbH	Initial specification approved with thanks by Con- tinental Automotive GmbH, extended by source- entity-instance column.

## Best Trace Format (BTF)

## Contents

Ve	rsion	History	/	2
1	Intro	duction	۱۱	10
2	Best 2.1			11 13
	2.2	Param		13
		2.2.1		13
		2.2.2		14
		2.2.3		14
		2.2.4	-	14
		2.2.5		15
		2.2.6	5 51 11 5	16
		2.2.7		17
	2.3	Event		18
		2.3.1		20
		2.011		20
		2.3.2	55	22
		2.0.2		23
				23
				24
				24
				25
				25
				26
				26
				27
			<u> </u>	27
				28
				28
				29
				29
		2.3.3		31
		2.0.0		31
				32
				32
				33
				$\mathcal{O}$



2.3.4	Scheduler Events
	2.3.4.1 schedule
	2.3.4.2 schedulepoint
2.3.5	OS-Events
	2.3.5.1 clear_event
	2.3.5.2 set_event
	2.3.5.3 wait_event
2.3.6	Signal Events
	2.3.6.1 read
	2.3.6.2 write
2.3.7	Semaphore Events
	2.3.7.1 assigned
	2.3.7.2 decrement
	2.3.7.3 free
	2.3.7.4 full
	2.3.7.5 increment
	2.3.7.6 lock
	2.3.7.7 lock used
	2.3.7.8 overfull
	2.3.7.9 queued
	2.3.7.10 released
	2.3.7.11 requestsemaphore
	2.3.7.12 unlock
	2.3.7.13 unlock_full
	2.3.7.14 used
	2.3.7.15 waiting
	$\sim$
References .	



## List of Figures

2-1	BTF Specification
	Parameter Specification 13
2-3	Event Specification
2-4	Process State Chart 22
2-5	Runnable State Chart
2-6	Semaphore State Chart



#### List of Tables

2-1	Definition of Version Parameter	13
2-2	Definition of Creation Date Parameter	14
2-3	Definition of Creator Parameter	14
2-4	Definition of Entity Mapping Parameter	15
2-5	Definition of Entity Type Mapping Parameter	16
2-6	Definition of Time Scale Parameter	16
2-7	Definition of Type Mapping Parameter	17
2-8	Description of Event Fields	19
2-9	Definition of Stimulus Trigger Event	20
2-10	States for Process Entities	23
2-11	Definition of Process Activate Event	23
	Definition of Process Interrupt_Suspended Event	24
	Definition of Process Mtalimitexceeded Event	24
	Definition of Process Park Event	25
	Definition of Process Poll Event	25
	Definition of Process Poll_Parking Event	26
	Definition of Process Preempt Event	26
2-18	Definition of Process Release Event	27
	Definition of Process Release_Parking Event	27
2-20	Definition of Process Resume Event	28
	Definition of Process Run Event	28
	Definition of Process Start Event	29
	Definition of Process Terminate Event	29
	Definition of Process Wait Event	30
	States for Runnable Entities	31
-	Definition of Runnable Resume Event	32
	Definition of Runnable Start Event	32
	Definition of Runnable Suspend Event	33
	Definition of Runnable Terminate Event	33
	Definition of Scheduler Schedule Event	35
	Definition of Scheduler Schedulepoint Event	35
	Definition of OS-Event Clear_Event Event	37
	Definition of OS-Event Set Event Event	38
	Definition of OS-Event Wait_Event	38
	Definition of Signal Read Event	40
	Definition of Signal Write Event	40
	States for Semaphore Entities	42
	Definition of Semaphore Assigned Event	43
	Definition of Semaphore Decrement Event	43
	Definition of Semaphore Free Event	44
	Definition of Semaphore Full Event	44
	Definition of Semaphore Increment Event	45
	Definition of Semaphore Lock Event	45
	Definition of Semaphore Lock_Used Event	46
	Definition of Semaphore Overfull Event	46
<u>∠</u> -+J		-10



2-46 Definition of Semaphore Queued Event	. 47
2-47 Definition of Semaphore Released Event	. 47
2-48 Definition of Semaphore Requestsemaphore Event	. 48
2-49 Definition of Semaphore Unlock Event	. 48
2-50 Definition of Semaphore Unlock_Full Event	. 49
2-51 Definition of Semaphore Used Event	. 49
2-52 Definition of Semaphore Waiting Event	. 50



## List of Listings

2-1	Snippet of a BTF File
2-2	Syntax of Comments
2-3	Example for BTF Events
2-4	Example with Task Activations by Stimuli
2-5	Example with an OS-Event Set by a Stimulus
2-6	Example with a Signal Written by a Stimulus
2-7	BTF Extract with Process Events
2-8	BTF Extract with Runnable and Task Events
2-9	BTF Extract with Sub-Runnables
2-10	BTF Extract with Scheduler Events
2-11	BTF Extract with OS-Event events
2-12	BTF Extract with Signal Events
2-13	BTF Extract with Semaphore Events



### 1 Introduction

This document specifies the CSV-based Best Trace Format (BTF) used to record traces on system level in order to analyze timing, performance, and reliability of embedded real-time multi-core systems.

The Best Trace Format is based on the Better Trace Format (BTF V1.0) and its first public release was v2.0.2 in 2013.

The BTF trace format, recorded by simulation or profiling tools, allows to analyze the behavior of a system in a chronologically correct manner. It assumes a signal processing system where one entity of the system influences another entity. Therefore, logged events in the BTF do not only contain information about state changes of entities but also the reason of these changes.

Advanced scheduling concepts may be used in multi-core systems where one traced entity may have multiple instances at the same time. For this purpose, the Best Trace Format provides instance identification in order to derive which instance of the entity is addressed in the event log. This means for example that each task execution can be exactly identified for the complete lifetime from activation until termination by its name and instance counter.

At first, a description of the optional comments which can appear anywhere within a trace log is presented in Section 2.1. This is followed by the definition of the parameters in Section 2.2. These describe the meta-information of a BTF compliant file. Finally, Section 2.3 specifies the exact format of the CSV-based trace log. It introduces all entities and their according logging events suggested by this specification to guarantee a reliable timing and performance analysis.

The concepts used in this specification are based on OSEK [2] and AUTOSAR [1].



## 2 Best Trace Format (BTF)

The BTF trace is a ordered list of data records which is represented in a UTF-8 encoded CSV (comma-separated values) format. As shown in Listing 2-1, each line of the file is a data record and represents a piece of information, which can either be a comment, a parameter definition, or an event entry. A comma (',') is used to separate the content within an entry. For cases, in which floating numbers have to be represented, a dot ('.') must be used as decimal separator.

```
1
  #version 2.2.0
2
  #creator TA-Tool Suite 12.06.1
3
 # Simulation of dualcore processor 120MHz, 16Kbyte RAM
4
 #creationDate 2012-08-31T15:53:00
5
 #timeScale ns
6
 0,Stimulus Task A,0,T,Task A,0,activate
7
  100,Core_1,0,T,Task_A,0,start
8 100, Task A, 0, R, Runnable A 1, 0, start
9 200, Task A, 0, SIG, S1, 0, read, 12.3
```

Listing 2-1: Snippet of a BTF File

The interpretation of each line depends on its type. As shown in Figure 2-1, there are three different groups of types available which are introduced in detail in the following sections.

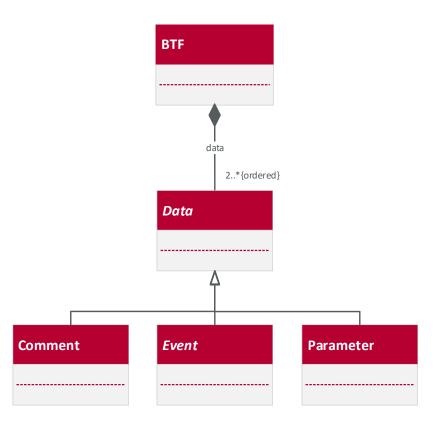


Figure 2-1: BTF Specification




There are two ways to represent the data records. The symbolic-mode describes entities and events by names. The numeric-mode describes entities and events by a numerical identifier. In the latter case, the parameters *Entity Mappings* (see Section 2.2.4), *Type Mappings* (see Section 2.2.7), or *Entity Type Mappings* (see Section 2.2.5) define a mapping between a numerical identifier and a string of the name.



#### 2.1 Comment

Each row starting with a '#' symbol and followed by a blank space is defined as a *Comment*, as shown in Listing 2-2.



#### 2.2 Parameter

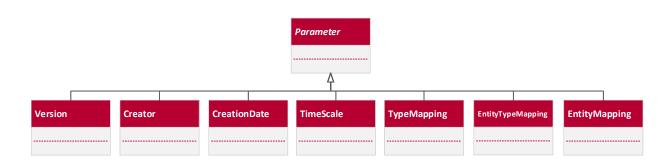


Figure 2-2: Parameter Specification

A *parameter* gives meta information on the trace and allows one to interpret it correctly. As a consequence, some pieces of information are mandatory and others are optional.

Each *parameter* definition is indicated by a '#' symbol at the beginning. In contrast to *comments*, a *parameter* definition must not start with a blank space after the '#' symbol but with a predefined keyword or symbol.

As shown in Figure 2-2, the following parameters are predefined.

#### 2.2.1 Version Parameter

The *version* parameter is mandatory and specifies the version of the BTF format definition. Each BTF file must start with the version parameter (*version*) that indicates which specification has to be considered for processing the BTF file.

Property	Description
Definition	#version <number></number>
Туре	<number>: String</number>
Multiplicity	11
Example	#version 2.1.6

 Table 2-1: Definition of Version Parameter

[Constraint: There must be exactly one version parameter in a BTF file.]

**Constraint:** The version parameter must be the first entry a BTF file.



#### 2.2.2 Creation Date Parameter

The *creation date* parameter is optional and specifies the timestamp of the start of simulation or measurement. The format has to comply with "ISO 8601 extended specification for representations of dates and times": YYYY-MM-DDTHH:MM:SS. The time shall be in UTC time, which is indicated by a 'Z' at the end.

Property	Description
Definition	#creationDate <date></date>
Туре	<date>: String matching ISO 8601 date format</date>
Multiplicity	01
Example	#creationDate 2012-09-02T16:40:30Z

Table 2-2: Definition of Creation Date Parameter

[Constraint: The BTF file must not contain more than one creation date parameter.]

**Constraint:** The creation date parameter must be written before the first event entry.

#### 2.2.3 Creator Parameter

The *creator* parameter is optional and specifies the name and version of the application software or device that generated the trace.

Property	Description
Definition	#creator <info></info>
Туре	<info>: String</info>
Multiplicity	01
Example	#creator TA-Simulator (12.10.2.47)

 Table 2-3:
 Definition of Creator Parameter

**Constraint:** The BTF file must not contain more than one creator parameter.

**Constraint:** The creator parameter must be written before the first event entry.

#### 2.2.4 Entity Mapping Parameter

The *entity mapping* parameter is optional and indicates a mapping of an entity to a numerical ID. An entity can be a task, runnable, etc.



Property	Description	
Definition	#entityMapping <id> <name></name></id>	
Туре	<id>: Non-negative integer</id>	
туре	<name>: String</name>	
Multiplicity	01	
	#entityMapping 0 Task_1ms	
Example	#entityMapping 1 GetSignal	
Example	#entityMapping 2 Main	
	#entityMapping 3 Temperature	

**Table 2-4:** Definition of Entity Mapping Parameter

**Constraint:** The IDs within the entity mapping parameter must be unique.

**[Constraint:** The entity mapping must be written before the first event of the according entity.]

#### 2.2.5 Entity Type Mapping Parameter

The *entity type mapping* parameter is optional and indicates a bijective mapping of an entity to a specific entity type. Instead of entering the names of the entities and types in this mapping, it is also possible to use the numerical IDs defined in the type mapping or entity mapping.



Property	Description		
Definition	#entityTypeMapping <type> <name></name></type>		
Туре	<type>: String/non-negative integer</type>		
Туре	<name>: String/non-negative integer</name>		
Multiplicity	01		
	#entityTypeMapping T Task_1ms		
Example	#entityTypeMapping R GetSignal		
	#entityTypeMapping R Main		
	#entityTypeMapping SIG Temperature		
	#entityMapping 0 Task_1ms		
	#entityMapping 1 GetSignal		
	#entityMapping 2 Main		
	#entityMapping 3 Temperature		
	#typeMapping 0 T		
Example (numeric)	#typeMapping 1 R		
	#typeMapping 2 SIG		
	#entityTypeMapping 0 0		
	#entityTypeMapping 1 1		
	#entityTypeMapping 1 2		
	#entityTypeMapping 2 3		

**Table 2-5:** Definition of Entity Type Mapping Parameter

**[Constraint:** In case the numeric IDs from a type mapping or entity mapping are used, the type mapping or entity mapping must be defined before the entity type mapping.]

**Constraint:** The entity type mapping must be written before the first event of the according entity.

#### 2.2.6 Time Scale Parameter

The *time scale* parameter is mandatory and specifies the resolution of the timestamps in the trace.

Property	Description
Definition	#timescale <time></time>
Туре	<time>: String (Enumeration [ps,ns,us,ms,s])</time>
Multiplicity	11
Example	#timescale ns

 Table 2-6:
 Definition of Time Scale Parameter

**Constraint:** The BTF file must contain exactly one time scale parameter.

**Constraint:** The time scale parameter must be written before the first event entry.



#### 2.2.7 Type Mapping Parameter

The *type mapping* parameter is optional and indicates the mapping of an entity type to a numerical ID. See Section 2.3 for existing entity types.

Property	Description	
Definition	#typeMapping <id> <name></name></id>	
Type	<id>: Non-negative integer</id>	
Туре	<name>: String</name>	
Multiplicity	01	
	#typeMapping 0 T	
Example	#typeMapping 1 R	
	#typeMapping 2 SIG	

 Table 2-7: Definition of Type Mapping Parameter

**Constraint:** The IDs within the type mapping parameter must be unique.]

[Constraint: The type mapping must be written before the first event of the according type.]

#### 2.3 Event

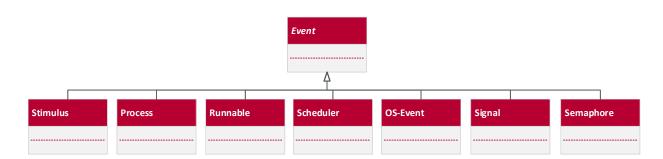


Figure 2-3: Event Specification

An *Event* gives information on what happened where and when within a system. To do so, an event entry is specified by the following elements:

<Time>,<Source>,<SourceInstance>,<TargetType>,<Target>,<TargetInstance>,<Event>,<Note>

An event entry is defined by eight fields, separated by commas. Each field describes a dedicated piece of information, which is necessary to interpret the event. The order of the fields and, thus, the position of the information, is fixed and cannot be changed. However, for some events, the last field is optional and can be omitted. Table 2-8 gives a detailed overview on the specified fields and their purpose.

Field	Name	Туре	Description
1	<time></time>	Non-negative Integer	Timestamp that states the absolute point in time at which the event was observed. The corresponding time scale is defined by the Time Scale Parameter (#timescale).
2	<source/>	String	Unique textual identifier of an entity which states the source of the observed event and that allows one to unambiguously distinguish between all entities.
3	<sourceinstance></sourceinstance>	Integer	Unique numerical identifier for the source instance of the observed event that allows one to unambigu- ously distinguish between instances of the same en- tity.
4	<targettype></targettype>	String	Type of the target entity and, thus, of the observed event.
5	<target></target>	String	Unique textual identifier of an entity which states the target of the observed event and that allows one to unambiguously distinguish between all entities.
6	<targetinstance></targetinstance>	Integer	Unique numerical identifier for the target instance of the observed event that allows one to unambigu- ously distinguish between instances of the same en- tity.
7	<event></event>	String	Name of the observed event.



Field	Name	Туре	Description
8	<note></note>	String	Additional information for specific events.

 Table 2-8: Description of Event Fields

[**Constraint:** The <Time> field must not decrease from one line to the next line in a BTF file.]

As shown in Figure 2-3, there are specific types of observable *Events* available which are stated in the fourth field (<TargetType>) of an event entry. Following sections introduce the types that are currently defined in the BTF. It is not required that all defined entity types appear in one single BTF file. Therefore, a BTF file may focus on only one or multiple target entity types as it is shown in Listing 2-1.

```
1 0, Stimulus Task A, 0, T, Task A, 0, activate
 2 100, Core 1, 0, T, Task A, 0, start
 3 100, Task A, 0, R, Runnable A 1, 0, start
 4 7100, Task A, 0, R, Runnable A 1, 0, terminate
 5 7100, Task A, 0, R, Runnable A 2, 0, start
 6 10000, Stimulus Task B, 0, T, Task B, 0, activate
 7 10100, Task A, 0, R, Runnable A 2, 0, suspend
 8 10100, Core 1, 0, T, Task A, 0, preempt
 9
   10100,Core 1,0,T,Task B,0,start
10
   10100, Task B, 0, R, Runnable B 1, 0, start
   17100, Task B, 0, R, Runnable B 1, 0, terminate
11
12 17100, Core 1, 0, T, Task B, 0, terminate
13 17200, Core 1, 0, T, Task A, 0, resume
14 17200, Task A, 0, R, Runnable A 2, 0, resume
15 21200, Task A, O, R, Runnable A 2, O, terminate
16 21200, Core 1, 0, T, Task A, 0, terminate
```

Listing 2-3: Example for BTF Events



#### 2.3.1 Stimulus Events

A *Stimulus* (STI) is used to represent interactions among the internal behavior and between the system and the surrounding environment.

#### 2.3.1.1 trigger

The **trigger** event indicates that the internal behavior or the surrounding environment triggers the activation of a task/interrupt service routine or the setting of a signal value or OS-Event.

Field	Description
<source/>	The source shall state the name of the stimulus entity that is triggered, if a process is activated or a signal value or OS-Event is set by the surrounding environment, or it shall state the name of a task/interrupt service routine, if the event represent an inter-process activation.
<sourceinstance></sourceinstance>	In case of an inter-process activation, the source instance shall state the number of the process instance or otherwise the number of the stimulus instance, which shall increase gaplessly with each event.
<targettype></targettype>	STI
<target></target>	The target shall state the name of the stimulus entity that is triggered.
<targetinstance></targetinstance>	The target instance shall state the number of the stimulus instance that is triggered.
<event></event>	trigger
<note></note>	This field shall not be used for a trigger event.

**Table 2-9:** Definition of Stimulus Trigger Event

**Constraint:** In case of an inter-process activation, the process instance stated as source shall be in RUNNING state at the time of the triggering.

**Constraint:** If the source is a stimulus, the source instance must be equal to the target instance.

**Constraint:** If the source is a stimulus, the source must be equal to the target.

**Constraint:** The trigger event must appear before the associated process activation and signal or OS-Event set event.

**[Constraint:** If the source is a stimulus, the source instance shall change unambiguously with each event.]

#### Example

In Listing 2-4, Task\_A is activated by Stimulus\_Task\_A (line 2), which is triggered before (line 1) as a single stimulus by environment, e.g., due to some alarm or schedule table. After that, Task\_A activates Task\_B via an inter-process activation. Therefore, Task\_A triggers Stimulus\_Task\_B (line 4) and this stimulus activates Task\_B afterwards (line 5).



```
1 0,Stimulus_Task_A,0,STI,Stimulus_Task_A,0,trigger
2 0,Stimulus_Task_A,0,T,Task_A,0,activate
3 100,Core_1,0,T,Task_A,0,start
4 7100,Task_A,0,STI,Stimulus_Task_B,0,trigger
5 7100,Stimulus_Task_B,0,T,Task_B,0,activate
```

```
6 7200, Core_1, 0, T, Task_A, 0, preempt
```

```
7 7200,Core_1,0,T,Task_B,0,start
```

Listing 2-4: Example with Task Activations by Stimuli

In Listing 2-5, the stimulus Periodic\_Stimulus sets OS-Event Event\_1.

1 20000000,SIM,0,STI,Periodic\_Stimulus,1,trigger

2 20000000, Periodic\_Stimulus, 1, EVENT, Event\_1, 0, set\_event, Task\_1

Listing 2-5: Example with an OS-Event Set by a Stimulus

In Listing 2-6, the stimulus Periodic\_Stimulus writes signal Signal\_1.

```
1 20000000,SIM,0,STI,Periodic_Stimulus,1,trigger
```

2 20000000, Periodic\_Stimulus, 1, SIG, Signal\_1, 0, write, 2

Listing 2-6: Example with a Signal Written by a Stimulus



#### 2.3.2 **Process Events (Task and ISR Events)**

A *Process* can be either a task (T) or an interrupt service routine (I). It is activated by a stimulus as described in Section 2.3.1. After activation, a scheduler assigns the process to a core where the process is executed. A running process can be preempted by another process and change to READY. Alternatively, a cooperative process can change itself to READY, e.g. at a schedule point, or explicitly migrate to another core.

If a running process calls the system service to wait for at least one operating system event and these events are not set, the process changes its state to WAITING. If the according event gets set, the process is again READY for execution.

A process accessing a resource which is locked by a semaphore (e.g. spinlock), checks repeatedly the availability of this resource within a loop. This active waiting of the process is represented by the POLLING state. The scheduler might decide in this scenario to remove the process from the core which results in PARKING. Is the resource available again, the process changes its state to READY.

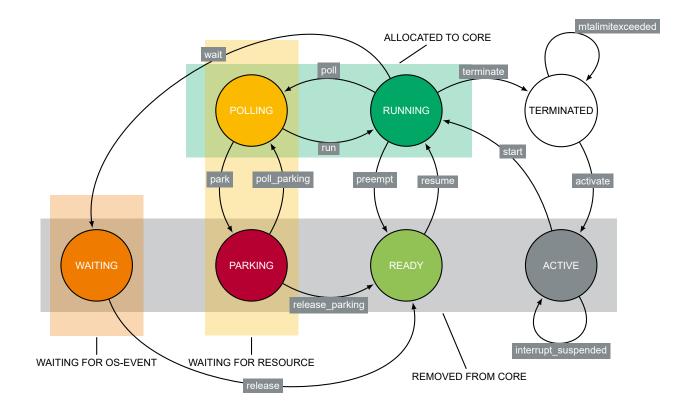


Figure 2-4: Process State Chart



State	Description
ACTIVE	The process instance is ready for execution.
PARKING	The process instance has been preempted while actively waiting for a resource that is not available.
POLLING	The process instance has requested a not available resource and waits actively.
READY	The process instance has been preempted.
RUNNING	The process instance executes on a core.
TERMINATED	The process instance has finished its execution or hasn't been activated yet.
WAITING	The process instance has called the system service to wait for an OS-Event which is not set and waits passively.

Table 2-10: States for Process Entities

At the beginning of a BTF trace, a process may be in any defined state.

#### 2.3.2.1 activate

The *activate* event indicates that a process instance (target) is activated by a stimulus (source) and, thus, transitions from TERMINATED to ACTIVE state.

Field	Description
<source/>	The source must state the name of the stimulus entity that activates the process.
<sourceinstance></sourceinstance>	The source instance must state the number of the stimulus instance that activates the task.
<targettype></targettype>	"T" if the activated process is a task and "I" if the it is an interrupt service routine.
<target></target>	The target must state the name of the process that is activated.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is ac- tivated and shall increase gaplessly with each activate or mtalimitexceeded event.
<event></event>	activate
<note></note>	This field must not be used for this event.

Table 2-11: Definition of Process Activate Event

**Constraint:** The source stimulus must be triggered before the process instance is activated. This order must be considered in the BTF file.]

#### 2.3.2.2 interrupt\_suspended

The *interrupt\_suspended* event indicates that the stated interrupt service routine instance (target) is not scheduled for execution by the scheduler (source) because of a previous OS service call to suspend interrupts.



Field	Description
<source/>	The source must state the name of the scheduler entity that manages the scheduling of this interrupt service routine.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	1
<target></target>	The target must state the name of the interrupt service routine that is suspended from execution.
<target></target>	The target instance must state the number of the interrupt service routine instance that is suspended from execution.
<event></event>	interrupt_suspended
<note></note>	This field must not be used for this event.

**Table 2-12:** Definition of Process Interrupt\_Suspended Event

#### 2.3.2.3 mtalimitexceeded

The *mtalimitexceeded* event indicates that a stimulus (source) attempts to activate a task (target) but the maximum allowed number of concurrent activations of this task is already reached and, thus, the task is not activated.

Field	Description
<source/>	The source must state the name of the stimulus entity that attempts to activate the task.
<sourceinstance></sourceinstance>	The source instance must state the number of the stimulus instance that attempts to activate the task.
<targettype></targettype>	Т
<target></target>	The target must state the name of the task entity whose maximum number of concurrent activations would be exceeded.
<targetinstance></targetinstance>	The instance number of the stated task entity must be increased with each event.
<event></event>	mtalimitexceeded
<note></note>	This field must not be used for this event.

**Table 2-13:** Definition of Process Mtalimitexceeded Event

#### 2.3.2.4 park

The *park* event indicates that a process (target) that is actively waiting for a resource is suspended, i.e, its execution is removed from the allocated core (source).



Field	Description
<source/>	The source must state the name of the core from which the process gets removed.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the parking process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is parked.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is parked.
<event></event>	park
<note></note>	This field must not be used for this event.

Table 2-14: Definition of Process Park Event

#### 2.3.2.5 poll

The *poll* event indicates that a process (target) that is executing on a core (source) requests a resource that is not available and starts waiting actively to access it.

Field	Description
<source/>	The source must state the name of the core on which the process is execut-
	ing.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the polling process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is polling.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is polling.
<event></event>	poll
<note></note>	This field must not be used for this event.

 Table 2-15:
 Definition of Process Poll Event

#### 2.3.2.6 poll\_parking

The *poll\_parking* event indicates that a process (target) that has been removed from the allocated core during actively waiting for a resource gets allocated to a core (source). During this reallocation, the requested resource is still not available.



Field	Description
<source/>	The source must state the name of the core on which the process resumes actively waiting for a resource.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the process that resumes actively waiting is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that resumes actively waiting.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that re- sumes actively waiting.
<event></event>	poll_parking
<note></note>	This field must not be used for this event.

 Table 2-16:
 Definition of Process Poll\_Parking Event

#### 2.3.2.7 preempt

The *preempt* event indicates that a process (target) that is executing on a core (source) gets removed from it due to a scheduling decision.

Field	Description
<source/>	The source must state the name of the core from which the process gets removed.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the preempted process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is preempted.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is preempted.
<event></event>	preempt
<note></note>	This field must not be used for this event

Table 2-17: Definition of Process Preempt Event

#### 2.3.2.8 release

The *release* event indicates that at least one OS-Event a process (target) is passively waiting for is set and the process is ready to proceed execution. During this time, the process is still removed from a core (source) due to a scheduling decision.



Field	Description
<source/>	The source must state the name of the core from which the process got removed when it started passively waiting for at least one OS-Event.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the released process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is released.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is released.
<event></event>	release
<note></note>	This field must not be used for this event.

 Table 2-18: Definition of Process Release Event

#### 2.3.2.9 release\_parking

The *release\_parking* event indicates that a process (target) that has been removed from the allocated core (source) during actively waiting for a resource gets access to this resource. During this time, the process is still removed from the core due to a scheduling decision.

Field	Description
<source/>	The source must state the name of the core from which the process got removed due to a scheduling decision.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the process getting access to a resource is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that gets access to a resource.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that gets access to a resource.
<event></event>	release_parking
<note></note>	This field must not be used for this event.

**Table 2-19:** Definition of Process Release\_Parking Event

#### 2.3.2.10 resume

The *resume* event indicates that a process (target) that has been removed from a core by a scheduler gets allocated to a core (source) due to a new scheduling decision.



Field	Description
<source/>	The source must state the name of the core to which the process gets allo- cated.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the resuming process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is resuming.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is resuming.
<event></event>	resume
<note></note>	This field must not be used for this event.

Table 2-20: Definition of Process Resume Event

#### 2.3.2.11 run

The *run* event indicates that a process (target) that is actively waiting for a resource on a core (source) gets access to this resource and continues execution.

Field	Description
<source/>	The source must state the name of the core on which the process is execut-
	ing.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the running process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is running.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is running.
<event></event>	run
<note></note>	This field must not be used for this event.

Table 2-21: Definition of Process Run Event

#### 2.3.2.12 start

The *start* event indicates that a process (target) that is active for execution gets scheduled and allocated to a core (source).



Field	Description
<source/>	The source must state the name of the core to which the process gets allo- cated.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the starting process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is starting.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is starting.
<event></event>	start
<note></note>	This field must not be used for this event.

 Table 2-22:
 Definition of Process Start Event

#### 2.3.2.13 terminate

The *terminate* event indicates that a process (target) has finished its execution.

Field	Description
<source/>	The source must state the name of the core on which the process has fin- ished its execution.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the terminating process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is terminating.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is terminating.
<event></event>	terminate
<note></note>	This field must not be used for this event.

 Table 2-23: Definition of Process Terminate Event

#### 2.3.2.14 wait

The *wait* event indicates that a process (target) calls a system service to wait for at least one OS-Event and these events are not set. The process gets removed from the core (source) it is allocated to.



Field	Description
<source/>	The source must state the name of the core from which the process gets removed.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"T" if the waiting process is a task and "I" if it is an interrupt service routine.
<target></target>	The target must state the name of the process that is waiting.
<targetinstance></targetinstance>	The target instance must state the number of the process instance that is waiting.
<event></event>	wait
<note></note>	This field must not be used for this event.

Table 2-24: Definition of Process Wait Event

#### Example

The example shows the activation of TASK\_InputProcessing (line 1), triggered by timer TIMER\_2ms. TASK\_InputProcessing starts execution (line 2). Afterwards, TIMER\_1ms activates TASK\_1MS (line 3). Due to scheduling effects, TASK\_InputProcessing gets preempted (line 4) and TASK\_1MS starts execution (line 5). After TASK\_1MS has finished execution (line 6), TASK\_InputProcessing resumes execution (line 7).

1 6150000,TIMER\_2ms,3,T,TASK\_InputProcessing,3,activate 2 6150100,Core\_1,0,T,TASK\_InputProcessing,3,start 3 6250000,TIMER 1MS,6,T,TASK 1MS,6,activate

4 6250100, Core 1, 0, T, TASK InputProcessing, 3, preempt

5 6250100, Core 1, 0, T, TASK 1MS, 6, start

6 6721825, Core 1, 0, T, TASK 1MS, 6, terminate

7 6721925, Core\_1, 0, T, TASK\_InputProcessing, 3, resume

8 7110175, Core 1, 0, T, TASK InputProcessing, 3, terminate



#### 2.3.3 Runnable Events

A runnable (R) is called in context of a process instance or by another runnable. A called runnable starts and changes to RUNNING. If the process instance which includes the runnable gets removed from core (e.g. preempted), the currently executed runnable is suspended and changes to state SUSPENDED. If the process instance gets allocated to core (e.g. resumed), the runnable changes to RUNNING. After complete execution, the runnable changes to TER-MINATED.

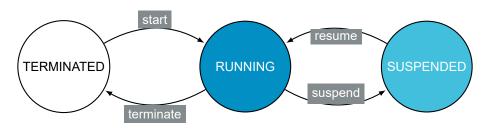


Figure 2-5: Runnable State Chart

State	Description
RUNNING	The runnable instance executes on a core.
SUSPENDED	The runnable instance stops execution as the process instance has to be re- moved from core.
TERMINATED	The runnable instance has finished execution or hasn't been started yet.

Table 2-25: States for Runnable Entities

At the beginning of a BTF trace, a runnable may be in any of above states.

As runnables are executed in context of a process, the process is seen as source of all state transitions. This implies that the process has to be allocated to a core to initiate a new runnable state. This has an effect on the expected process and runnable event order in a BTF trace. These constraints will be defined in the following chapters.

Similar scenario is also expected in case a runnable calls another runnable (sub-runnable) as direct function call. Constraints will be defined which define that a runnable is in RUNNING state if a sub-runnable is in RUNNING state. Below chapters imply that the process context must also be used as source for sub-runnables.

#### 2.3.3.1 resume

The *resume* event indicates that a runnable (target) can continue execution as its process (source) resumes.



Field	Description
<source/>	The source must state the name of the process that is calling the runnable.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that is calling the runnable.
<targettype></targettype>	"R"
<target></target>	The target must state the name of the runnable that is resuming.
<targetinstance></targetinstance>	The target instance must state the number of the runnable instance that is resuming.
<event></event>	resume
<note></note>	This field must not be used for this event.

Table 2-26: Definition of Runnable Resume Event

**Constraint:** A runnable instance gets resumed after its process instance got allocated to a core. This order has to be considered in the BTF file.

**Constraint:** A sub-runnable instance gets resumed after its calling runnable instance is resumed. This order has to be considered in the BTF file.

#### 2.3.3.2 start

The *start* event indicates that a runnable (target) gets called by a process (source) and starts execution.

Field	Description
<source/>	The source must state the name of the process that is calling the runnable.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that is calling the runnable.
<targettype></targettype>	"R"
<target></target>	The target must state the name of the runnable that is starting.
<targetinstance></targetinstance>	The target instance must state the number of the runnable instance that is starting and must increase gaplessly with each event.
<event></event>	start
<note></note>	This field must not be used for this event.

 Table 2-27:
 Definition of Runnable Start Event

**Constraint:** A runnable instance gets started after its process instance got allocated to a core. This order has to be considered in the BTF file.]

**Constraint:** A sub-runnable instance gets started after its calling runnable instance is started. This order has to be considered in the BTF file.]

#### 2.3.3.3 suspend

The *suspend* event indicates that a runnable (target) has to pause its execution as its calling process (source) gets preempted.



Field	Description
<source/>	The source must state the name of the process that is calling the runnable.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that is calling the runnable.
<targettype></targettype>	"R"
<target></target>	The target must state the name of the runnable that is suspended.
<targetinstance></targetinstance>	The target instance must state the number of the runnable instance that is suspended.
<event></event>	suspend
<note></note>	This field must not be used for this event.

Table 2-28: Definition of Runnable Suspend Event

**Constraint:** A runnable instance gets suspended before its process instance is removed from a core. This order has to be considered in the BTF file.

**Constraint:** A sub-runnable instance gets suspended before its calling runnable instance is suspended. This order has to be considered in the BTF file.

#### 2.3.3.4 terminate

The *terminate* event indicates that a runnable (target) that has been called by a process (source) has finished its execution.

Field	Description
<source/>	The source must state the name of the process that is calling the runnable.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that is calling the runnable.
<targettype></targettype>	"R"
<target></target>	The target must state the name of the runnable that is terminating.
<targetinstance></targetinstance>	The target instance must state the number of the runnable instance that is terminating.
<event></event>	terminate
<note></note>	This field must not be used for this event.

 Table 2-29:
 Definition of Runnable Terminate Event

**Constraint:** All runnable instances executed in context of a process instance have to be terminated before the process instance itself gets terminated. This order has to be considered in the BTF file.]

[**Constraint:** All sub-runnable instances called by a runnable instance have to be terminated before the runnable instance itself gets terminated. This order has to be considered in the BTF file.]



#### Example

Runnable Runnable\_A is started (line 1) and then suspended as Task\_B with Runnable\_B gets allocated to Core\_1 (line 2 till 6). After termination of Runnable\_B (line 7), Runnable\_A resumes execution as Task A gets allocated to Core 1 (line 9 and 10).

```
1 100100,Task_A,0,R,Runnable_A,0,start
2 125000,Stimulus_2,0,T,Task_B,0,activate
3 125100,Task_A,0,R,Runnable_A,0,suspend
4 125100,Core_1,0,T,Task_A,0,preempt
5 125100,Core_1,0,T,Task_B,0,start
6 125100,Task_B,0,R,Runnable_B,0,start
7 126100,Task_B,0,R,Runnable_B,0,terminate
8 126100,Core_1,0,T,Task_B,0,terminate
9 126200,Core_1,0,T,Task_A,0,resume
10 126200,Task_A,0,R,Runnable_A,0,resume
11 151200,Task_A,0,R,Runnable_A,0,terminate
```

Listing 2-8: BTF Extract with Runnable and Task Events

In Listing 2-9 Runnable\_1 gets started by Task\_1 (line 1). Afterwards, Runnable\_1 starts Runnable\_1\_1 as direct function call (line 2). Due to scheduling effects, first Runnable\_1\_1 and then Runnable\_1 get suspended (line 3 and 4). This enables execution of Runnable\_2 (line 5). After Runnable\_2 finishes execution (line 6), Runnable\_1 resumes execution (line 7) first and afterwards Runnable\_1\_1 (line 8). Then sub-runnable Runnable\_1\_1 (line 9) and runnable Runnable\_1 (line 10) finishes execution.

```
1 100,Task_1,0,R,Runnable_1,0,start
2 170,Task_1,0,R,Runnable_1_1,0,start
3 205,Task_1,0,R,Runnable_1_1,0,suspend
4 205,Task_1,0,R,Runnable_1,0,suspend
5 205,Task_2,0,R,Runnable_2,0,start
6 275,Task_2,0,R,Runnable_2,0,terminate
7 375,Task_1,0,R,Runnable_1,0,resume
8 375,Task_1,0,R,Runnable_1_1,0,resume
9 410,Task_1,0,R,Runnable_1_1,0,terminate
10 480,Task_1,0,R,Runnable_1,0,terminate
```

Listing 2-9: BTF Extract with Sub-Runnables



#### 2.3.4 Scheduler Events

The scheduler (SCHED) is part of the operating system and manages one or multiple cores. It is responsible for the execution order of all mapped processes on those cores.

#### 2.3.4.1 schedule

The *schedule* event indicates that the scheduler (target and source) makes a scheduling decision.

Field	Description
<source/>	The source must state the name of the scheduler that makes the scheduling decision.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SCHED"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	schedule
<note></note>	This field must not be used for this event.

 Table 2-30:
 Definition of Scheduler Schedule Event

#### 2.3.4.2 schedulepoint

The *schedulepoint* event indicates that a scheduler (target) is requested by a task (source) at a cooperative schedule point.

Field	Description
<source/>	The source must state the name of the task that calls a cooperative schedule point.
<sourceinstance></sourceinstance>	The source instance must state the number of the task instance that calls a cooperative schedule point.
<targettype></targettype>	"SCHED"
<target></target>	The target must state the name of the scheduler that is requested.
<targetinstance></targetinstance>	0
<event></event>	schedulepoint
<note></note>	This field must not be used for this event.

**Table 2-31:** Definition of Scheduler Schedulepoint Event

**Constraint:** The source task instance has to be in RUNNING state to call a schedule point.

#### Example


TASK\_B is preempted (line 3), because it reaches a schedule point (line 2). A schedule decision is required and therefore Scheduler\_1 is called (line 4). As no task with higher priority is active, TASK\_B can be resumed (line 5).



```
1 10100,Core_1,0,T,Task_B,0,start
```

- 2 17100, Task\_B, 0, SCHED, Scheduler\_1, 0, schedulepoint
- 3 17100, Core\_1, 0, T, Task\_B, 0, preempt
- 4 17200, Scheduler\_1, 0, SCHED, Scheduler\_1, 0, schedule
- 5 17200,Core\_1,0,T,Task\_B,0,resume
- 6 24200, Core\_1, 0, T, Task\_B, 0, terminate

#### Listing 2-10: BTF Extract with Scheduler Events





# 2.3.5 OS-Events

OS-Events (EVENT) are objects provided by the operating system. They offer a possibility to synchronize different processes. An OS-Event is always associated with a task, which "owns" the event. If for example a task instance requires information provided by another process at a predefined position, it waits for an OS-Event it owns (wait\_event). If the according information is available, the providing process sets the OS-Event (set\_event) for the waiting task instance. In case the event should be reset, it has to be cleared (clear\_event) by its owner.

# 2.3.5.1 clear\_event

The *clear\_event* event indicates that a potentially set OS-Event (target) gets reset by the task owning this OS-Event.

Field	Description
<source/>	The source must state the name of the task that owns the OS-Event and clears it.
<sourceinstance></sourceinstance>	The source instance must state the number of the task instance that owns the OS-Event and clears it.
<targettype></targettype>	"EVENT"
<target></target>	The target must state the name of the OS-Event that is cleared.
<targetinstance></targetinstance>	0
<event></event>	clear_event
<note></note>	This field must not be used for this event.

**Table 2-32:** Definition of OS-Event Clear\_Event Event

**Constraint:** The source task instance has to be in RUNNING state to clear an OS-Event.

#### 2.3.5.2 set\_event

The *set\_event* event indicates that an OS-Event (target) gets set by a process or a stimulus (source).



Field	Description
<source/>	The source must state the name of the process or stimulus that sets the event.
<sourceinstance></sourceinstance>	The source instance must state the number of the process or stimulus in- stance that sets the event.
<targettype></targettype>	"EVENT"
<target></target>	The target must state the name of the OS-Event that is set.
<targetinstance></targetinstance>	0
<event></event>	set_event
<note></note>	This field must state the name of the task that owns the event and for that it gets set.

 Table 2-33:
 Definition of OS-Event Set\_Event Event

[Constraint: The source process instance has to be in RUNNING state to set an OS-Event.]

**Constraint:** The source stimulus has to be triggered before setting an OS-Event. This order has to be considered in the BTF file.]

#### 2.3.5.3 wait\_event

The *wait\_event* event indicates that a task calls a system service to wait for an OS-Event.

Field	Description
<source/>	The source must state the name of the task that owns the OS-Event and that calls the system service to wait for this OS-Event.
<sourceinstance></sourceinstance>	The source instance must state the number of the task instance that owns the OS-Event and that calls the system service to wait for the OS-Event.
<targettype></targettype>	"EVENT"
<target></target>	The target must state the name of the OS-Event the task has to wait for.
<targetinstance></targetinstance>	0
<event></event>	wait_event
<note></note>	This field must not be used for this event.

 Table 2-34:
 Definition of OS-Event Wait\_Event

**Constraint:** The source task instance has to be in RUNNING state to call a system service to wait for an OS-Event.

#### Example

Task\_A calls the system service to wait for the OS-Event ExampleOsEvent (line 5) and therefore, Task\_A has to wait (line 6). Task\_B sets this event for Task\_A (line 7), so that Task\_A can resume (line 8 and 9). Afterwards, the event gets cleared (line 10).



1 0,Stimulus\_Task\_A,0,T,Task\_A,0,activate

- 2 100,Core\_1,0,T,Task\_A,0,start
- 3 1000, Stimulus\_Task\_B, 0, T, Task\_B, 0, activate
- 4 1100,Core\_2,0,T,Task\_B,0,start


```
5 10108, Task A, 0, EVENT, ExampleOsEvent, 0, wait_event
```

6 10108,Core\_1,0,T,Task\_A,0,wait

```
7 11100, Task_B, 0, EVENT, ExampleOsEvent, 0, set_event, Task_A
```

- 8 11100,Core\_1,0,T,Task\_A,0,release
- 9 11200, Core\_1, 0, T, Task\_A, 0, resume
- 10 11200, Task\_A, 0, EVENT, ExampleOsEvent, 0, clear\_event
- 11 21100, Core\_1, 0, T, Task\_A, 0, terminate
- 12 21100,Core\_2,0,T,Task\_B,0,terminate

Listing 2-11: BTF Extract with OS-Event events





# 2.3.6 Signal Events

A *Signal* (SIG) is basically an address in the memory of a micro-controller. This memory location contains a certain value, which can be accessed by a process instance if required. So generally, a signal fulfills the function of naming the memory space, like a label. According to the stored value the process accessing it might change its behavior (READ). Besides a process also a stimulus is able to write to the storage location and change the value of this label (WRITE).

#### 2.3.6.1 read

The *read* event indicates that a signal (target) gets read by a process (source).

Field	Description
<source/>	The source must state the name of the process that reads the signal.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that reads the signal.
<targettype></targettype>	"SIG"
<target></target>	The target must state the name of signal that is read by the process.
<targetinstance></targetinstance>	0
<event></event>	read
<note></note>	This field can be used to track the current numerical value of the signal.

 Table 2-35:
 Definition of Signal Read Event

**Constraint:** The source process instance has to be in RUNNING state to read a signal.

#### 2.3.6.2 write

The write event indicates that a signal (target) gets written by a process or stimulus (source).

Field	Description
<source/>	The source must state the name of the process or stimulus that writes the signal.
<sourceinstance></sourceinstance>	The source instance must state the number of the process or stimulus in- stance that writes the signal.
<targettype></targettype>	"SIG"
<target></target>	The target must state the name of signal that is written by the process.
<targetinstance></targetinstance>	0
<event></event>	write
<note></note>	This field can be used to track the new numerical value of the signal.

 Table 2-36:
 Definition of Signal Write Event

[**Constraint:** The source process instance has to be in RUNNING state to write a signal.] [**Constraint:** The source stimulus instance has to be triggered before writting to a signal.]



#### Example

Stimulus STI\_MODE\_SWITCH writes value 1 to signal HighPowerMode (line 1) which is later read by TASK\_200MS (line 2). Afterwards, TASK\_WritingActuator writes value 0 to signal S16\_C1\_1 (line 3) and TASK\_10MS reads it (line 4).

```
1 1222481,STI_MODE_SWITCH,0,SIG,HighPowerMode,0,write,1
```

```
2 1222481, TASK_200MS, 0, SIG, HighPowerMode, 0, read, 1
```

```
3 4482566, TASK_WritingActuator, 2, SIG, S16_C1_1, 0, write, 0
```

```
4 5590428, TASK_10MS, 0, SIG, S16_C1_1, 0, read, 0
```

Listing 2-12: BTF Extract with Signal Events



#### 2.3.7 Semaphore Events

If more than one process is able to access a common resource, it might be necessary to restrict the maximum amount of accesses in order to protect this resource from race conditions. Therefore, the operating system provides the possibility to use a *semaphore* (SEM) (e.g. spinlock). It is possible to assign processes to the protected resource as long as the maximum amount of simultaneous accesses is not reached (semaphore is unlocked). If a process is assigned and the maximum amount of semaphore users is reached, the resource gets locked. In this state every new accessing entity has to poll until one of the previous accessing ones releases the resource.

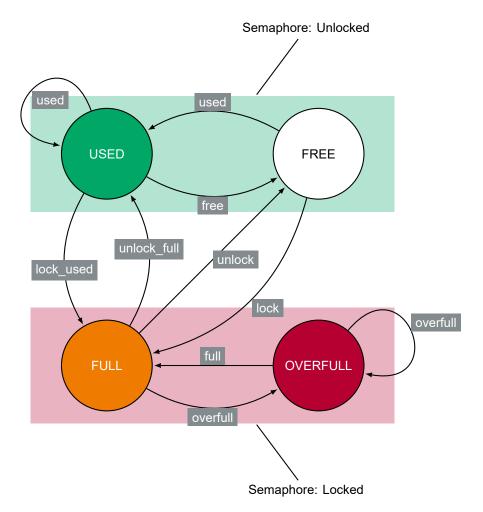


Figure 2-6: Semaphore State Chart

State	Description
FREE	Semaphore has no assigned users.
FULL	Semaphore has assigned requests and has reached its maximum amount of simul- taneous accesses.
OVERFULL	Semaphore is locked and at least one request is waiting for the semaphore.
USED	Semaphore has assigned requests and is still able to handle at least one request.

#### Table 2-37: States for Semaphore Entities



At the beginning of a trace, a semaphore may be in any of above states.

# 2.3.7.1 assigned

The *assigned* event indicates that a process (source) gets assigned to a semaphore (target) and does not have to wait for assignment.

Field	Description
<source/>	The source must state the name of the process that gets assigned.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that gets assigned.
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore the process is assigned to.
<targetinstance></targetinstance>	0
<event></event>	assigned
<note></note>	This field must state the amount of accesses.

 Table 2-38:
 Definition of Semaphore Assigned Event

**Constraint:** The assigned event has to appear after the increment or decrement event in the BTF file.]

#### 2.3.7.2 decrement

The *decrement* event indicates that a process (source) has released a semaphore (target) and now decrements its counter.

Field	Description
<source/>	The source must state the name of the process that decrements the counter
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that decrements the counter
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore whose counter gets decre- mented
<targetinstance></targetinstance>	0
<event></event>	decrement
<note></note>	This field must state the amount of accesses after the current release/decre- ment

 Table 2-39: Definition of Semaphore Decrement Event

**[Constraint:** The source process instance has to be in RUNNING state to decrement a semaphore.]

**Constraint:** The decrement event has to appear after the released event in the BTF file.

**Constraint:** The semaphore has to change its state after the decrement event. This order





must be considered in the BTF file.]

# 2.3.7.3 free

The *free* event indicates that a semaphore (source and target) reaches 0 assigned users and was not full before.

Field	Description
<source/>	The source must state the name of the semaphore that gets freed.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	free
<note></note>	This field must state the amount of accesses, which is 0 in this case.

 Table 2-40:
 Definition of Semaphore Free Event

#### 2.3.7.4 full

The *full* event indicates that a semaphore (source and target) gets released by a user and reaches its maximum amount of assignable semaphore users. In this case, no requesting user has to wait anymore.

Field	Description
<source/>	The source must state the name of the semaphore that gets released and reaches its maximum amount of assignable semaphore users.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	full
<note></note>	This field must state the amount of accesses, which is the maximum amount of assignable semaphore users in this case.

**Table 2-41:** Definition of Semaphore Full Event

#### 2.3.7.5 increment

The *increment* event indicates that a process (source) has requested a semaphore (target) and now increments its counter.



Field	Description
<source/>	The source must state the name of the process that increments the counter.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that increments the counter.
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore whose counter gets incre- mented.
<targetinstance></targetinstance>	0
<event></event>	increment
<note></note>	This field must state the amount of accesses after the current request/incre- ment.

 Table 2-42: Definition of Semaphore Increment Event

[**Constraint:** The source process instance has to be in RUNNING state to increment a semaphore.]

**Constraint:** The increment event has to appear after the requestsemaphore event in the BTF file.]

**Constraint:** The semaphore has to change its state after the increment event. This order must be considered in the BTF file.

# 2.3.7.6 lock

The *lock* event indicates that a semaphore (source and target) is requested by a user and reaches its maximum amount of assignable semaphore users and had no user assigned before.

Field	Description
<source/>	The source must state the name of the semaphore that is requested by a user and reaches its maximum amount of assignable semaphore users and had no user assigned before.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	lock
<note></note>	This field must state the amount of accesses, which is 1 in this case.

#### Table 2-43: Definition of Semaphore Lock Event

#### 2.3.7.7 lock\_used

The *lock\_used* event indicates that a semaphore (source and target) is requested by an additional user and reaches its maximum amount of assignable semaphore users.



Field	Description
<source/>	The source must state the name of the semaphore that is requested by an additional user and reaches its maximum amount of assignable semaphore users.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	lock_used
<note></note>	This field must state the amount of accesses, which is the maximum amount of assignable semaphore users in this case.

**Table 2-44:** Definition of Semaphore Lock\_Used Event

#### 2.3.7.8 overfull

The *overfull* event indicates that a semaphore (source and target) is requested by a user and has more simultaneous accesses as assignable. Therefore, at least one requesting user has to wait.

Field	Description
<source/>	The source must state the name of the semaphore that is requested by a user and has more simultaneous accesses as assignable.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	overfull
<note></note>	This field must state the amount of accesses, which is greater as the maxi- mum amount of assignable semaphore users in this case.

 Table 2-45:
 Definition of Semaphore Overfull Event

# 2.3.7.9 queued

The *queued* event indicates that a process (source) has requested a semaphore (target) and this request is queued to be either assigned or waiting later on.



Field	Description
<source/>	The source must state the name of the process that is queued.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that is queued.
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore that queues the process request.
<targetinstance></targetinstance>	0
<event></event>	queued
<note></note>	This field must state the amount of accesses after the current request/incre- ment.

**Table 2-46:** Definition of Semaphore Queued Event

[Constraint: The queued event has to appear after the increment event in the BTF file.]

#### 2.3.7.10 released

The *released* event indicates that a process (source) that is assigned to a semaphore (target) releases this semaphore.

Field	Description
<source/>	The source must state the name of the process that releases the semaphore.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that releases the semaphore.
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore that gets released.
<targetinstance></targetinstance>	0
<event></event>	released
<note></note>	This field must state the amount of accesses before processing the current release/decrement.

**Table 2-47:** Definition of Semaphore Released Event

[Constraint: The source process instance has to be in RUNNING state to release a semaphore.]

#### 2.3.7.11 requestsemaphore

The *requestsemaphore* event indicates that a process (source) requests a semaphore (target).



Field	Description
<source/>	The source must state the name of the process that requests the semaphore.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that requests the semaphore.
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore that gets requested.
<targetinstance></targetinstance>	0
<event></event>	requestsemaphore
<note></note>	This field must state the amount of accesses before processing the current request/increment.

Table 2-48: Definition of Semaphore Requestsemaphore Event

**Constraint:** The source process instance has to be in RUNNING state to request a semaphore.

#### 2.3.7.12 unlock

The *unlock* event indicates that a semaphore (source and target) reaches 0 assigned users and was full before.

Field	Description
<source/>	The source must state the name of the semaphore that reaches 0 assigned users and was full before.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	unlock
<note></note>	This field must state the amount of accesses, which is 0 in this case.

**Table 2-49:** Definition of Semaphore Unlock Event

# 2.3.7.13 unlock\_full

The *unlock\_full* event indicates that a semaphore (source and target) is released by a user, has still other users assigned and was full before.



Field	Description
<source/>	The source must state the name of the semaphore that is released by a user, has still other users assigned and was full before.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	unlock_full
<note></note>	This field must state the amount of accesses, which is greater than 0 and less than the maximum amount of assignable semaphore users in this case.

Table 2-50: Definition of Semaphore Unlock\_Full Event

#### 2.3.7.14 used

The *used* event indicates that a semaphore (source and target) is requested and has users assigned. The amount of assigned semaphore users is afterwards still less than the maximum amount of assignable semaphore users.

Field	Description
<source/>	The source must state the name of the semaphore that gets a user assigned but does not reach the maximum amount of assignable semaphore users.
<sourceinstance></sourceinstance>	0
<targettype></targettype>	"SEM"
<target></target>	The target must state the same name as the source.
<targetinstance></targetinstance>	0
<event></event>	used
<note></note>	This field must state the amount of accesses, which is greater than 0 and less than the maximum amount of assignable semaphore users in this case.

 Table 2-51: Definition of Semaphore Used Event

#### 2.3.7.15 waiting

The *waiting* event indicates that a process (source) requests a semaphore (target). The semaphore has already reached the maximum amount of assignable semaphore users. Therefore, the request has to wait.



Field	Description
<source/>	The source must state the name of the process that requests the semaphore and has to wait for its assignment.
<sourceinstance></sourceinstance>	The source instance must state the number of the process instance that requests the semaphore and has to wait for its assignment.
<targettype></targettype>	"SEM"
<target></target>	The target must state the name of the semaphore that gets requested and has already reached its maximum amount of assignable semaphore users.
<targetinstance></targetinstance>	0
<event></event>	waiting
<note></note>	This field must state the amount of accesses after processing the current request/increment.

**Table 2-52:** Definition of Semaphore Waiting Event

[Constraint: The waiting event has to appear after the increment event in the BTF file.]

#### Example

The following example shows the behavior of a semaphore Sem1, which has 1 as its maximum count of assignable semaphore users. It is requested by Process1 (line 2 till 4), which gets assigned to the resource (line 6). Therefore, Sem1 gets locked (line 5) and the second requesting process Process2 (line 7 till 9) has to wait (line 10 and 11) until Process1 releases the resource (line 12 and 13).

```
1 0, Sem1, 0, SEM, Sem1, 0, free, 0
 2 308, Process1, 0, SEM, Sem1, 0, requestsemaphore, 0
 3 308, Process1, 0, SEM, Sem1, 0, increment, 1
 4 308, Process1, 0, SEM, Sem1, 0, queued, 1
 5 308, Sem1, 0, SEM, Sem1, 0, lock, 1
 6 308, Process1, 0, SEM, Sem1, 0, assigned, 1
 7
   9539, Process2, 0, SEM, Sem1, 0, requestsemaphore, 1
 8 9539, Process2, 0, SEM, Sem1, 0, increment, 2
 9
   9539, Process2, 0, SEM, Sem1, 0, queued, 2
10
   9539, Sem1, 0, SEM, Sem1, 0, overfull, 2
11 9539, Process2, 0, SEM, Sem1, 0, waiting, 2
12 462154, Process1, 0, SEM, Sem1, 0, released, 2
13 462154, Process1, 0, SEM, Sem1, 0, decrement, 1
14 462154, Sem1, 0, SEM, Sem1, 0, full, 1
15 462154, Process2, 0, SEM, Sem1, 0, assigned, 1
```

Listing 2-13: BTF Extract with Semaphore Events



# References

- [1] AUTOSAR. *Specification of Operating System*. Specification. Release 4.4.0. AUTOSAR, 2018.
- [2] ISO 17356-3:2005: Road vehicles Open Interface for Embedded Automotive Applications – Part 3: OSEK/VDX Operating System (OS). Tech. rep. Geneva, CH: International Organization for Standardization, 2005.